
StarLustre Two Side Coated Art Board

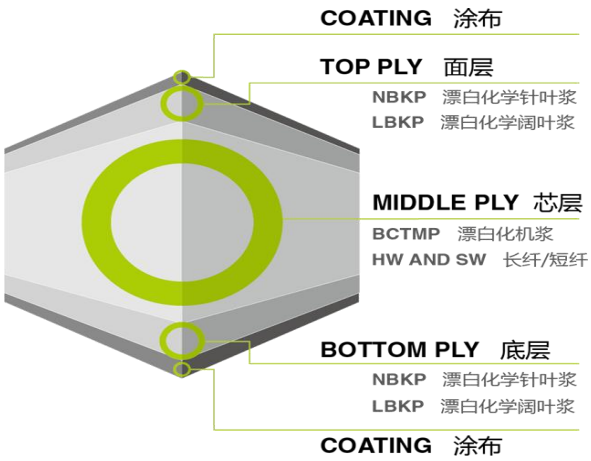

产品特点
Product features

1、运用先进的生产设备及生产工艺，确保纸张品质稳定。
Manufactured on advanced equipment and production processes, with consistently stable quality.

2、选用优质木浆原料，长短纤维科学配比，保证纸张强度。
Premium virgin pulp with an optimized long/short fiber blend for superior strength and runnability.

3、纸面平滑度、光泽度高，印刷还原性好，印后图案精美。
High smoothness and gloss for exceptional print fidelity and crisp, elegant finished graphics.

4、双面采用优质全面的高端涂层，满足客户高端印刷包装要求。
Premium two side coating engineered for high-end printing and packaging applications.

定量 Basis Weight		g/m^2	190	210	230	250	300	350	400	ISO 536	GB/T 451.2
定量偏差 Basis Weight Deviation(±)		g/m^2	6	6	7	8	9	10	12		
厚度 Caliper		μm	245	280	315	340	415	490	550	ISO 534	GB/T 451.3
厚度偏差 Caliper Deviation		μm	±10								
横向挺度 CD Stiffness(≥)		mN·m	1.7	2.1	3.3	3.8	6.2	9.2	12.0	ISO 2493, Taber15°	GB/T 22364
水分 Moisture	≤230g/m²	%	6.5±1.0							ISO 287	GB/T 462
	＞230～≤330g/m²		7.5±1.0								
	＞330g/m²		8.5±1.0								
内结合强度 Internal Bond		J/m^2	≥ 100				≥ 120			TAPPI T833	GB/T 26203
D65亮度 D65 Brightness	正面 Top	%	≥80							ISO 2470	GB/T 7974
	反面 Back										
表面吸水性 Cobb, 60s	正面 Top	g/m^2	≤ 60.0							ISO 535	GB/T 1540
	反面 Back										
涂布量	正面 Top	g/m^2	22-25								/
	反面 Back		22-25								/
光泽度	正面 Top	/	≥35								GB/T 8941
	反面 Back		≥20								
平滑度	正面 Top	S	≥80								GB/T 456
	反面 Back		≥20								
尘埃度 Dirt	（0.2～1.0）mm2	个/m^2	≤ 20							TAPPI T437	GB/T 1541
	（＞1.0～1.5）mm²		不应有 None								
	＞1.5mm²		不应有 None								
备注： Comments	1. 带★的不作为等级判定的依据； Specifications with "★" is not used for sheet classification. 2. 尘埃度要严格控制，不允许有很明显的斑点、尘埃； The dirt amount should be strictly controlled. Obviouse spot and dust are not allowed. 3. 未涉及到的定量、厚度、挺度等指标按就近插入法执行。 Using the nearest insertion method to determine the basis weight, caliper and stifiness which are not mentioned above.										